EUROPEAN UNION AGENCY FOR RAILWAYS

#ERAwebinars

Welcome! Webinar to start soon!

TSI Revision Package 2023 - Key Changes (Part II - Fixed Installations and Operation)

6 July 2023

12.00-13.00 [CEST]

EUROPEAN UNION AGENCY FOR RAILWAYS

Speakers

Antoine Defossez

Project Officer | ERA

Pedro Mestre

Project Officer | ERA

Gaetano Imperato

Project Officer | ERA

Esteban Coito González

Project Officer | ERA

Roberto Mele

Project Officer | ERA

EUROPEAN UNION AGENCY FOR RAILWAYS

Codification for combined transport

EUROPEAN UNION AGENCY FOR RAILWAYS

The issue of combined transport

The gauge reference profile

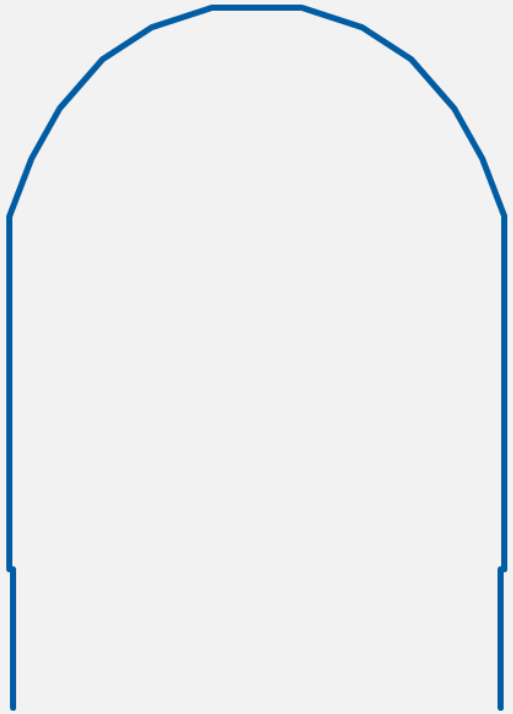

EUROPEAN UNION AGENCY FOR RAILWAYS

Solution: another codification system

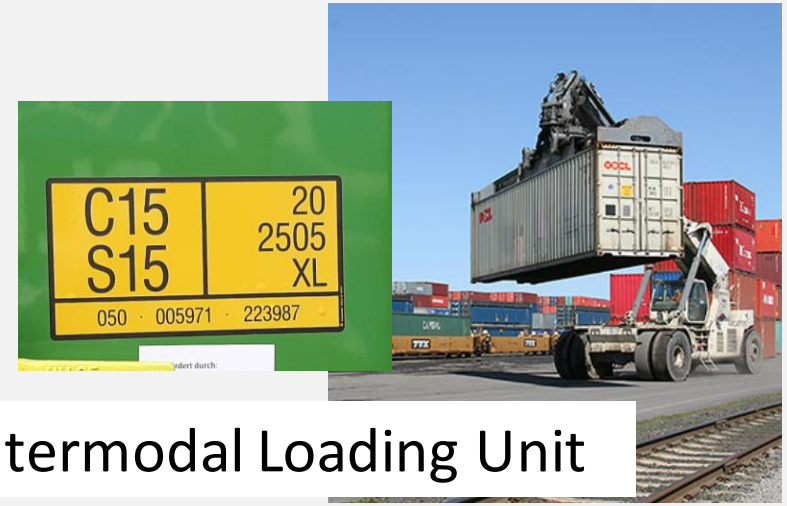

Intermodal Loading Unit

Operations

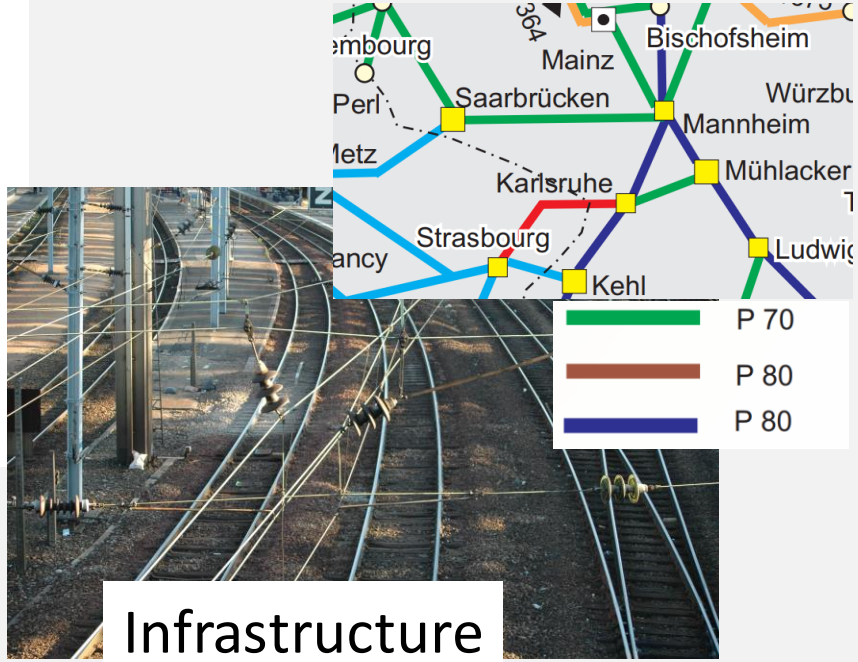

Wagon

Infrastructure

EUROPEAN UNION AGENCY FOR RAILWAYS

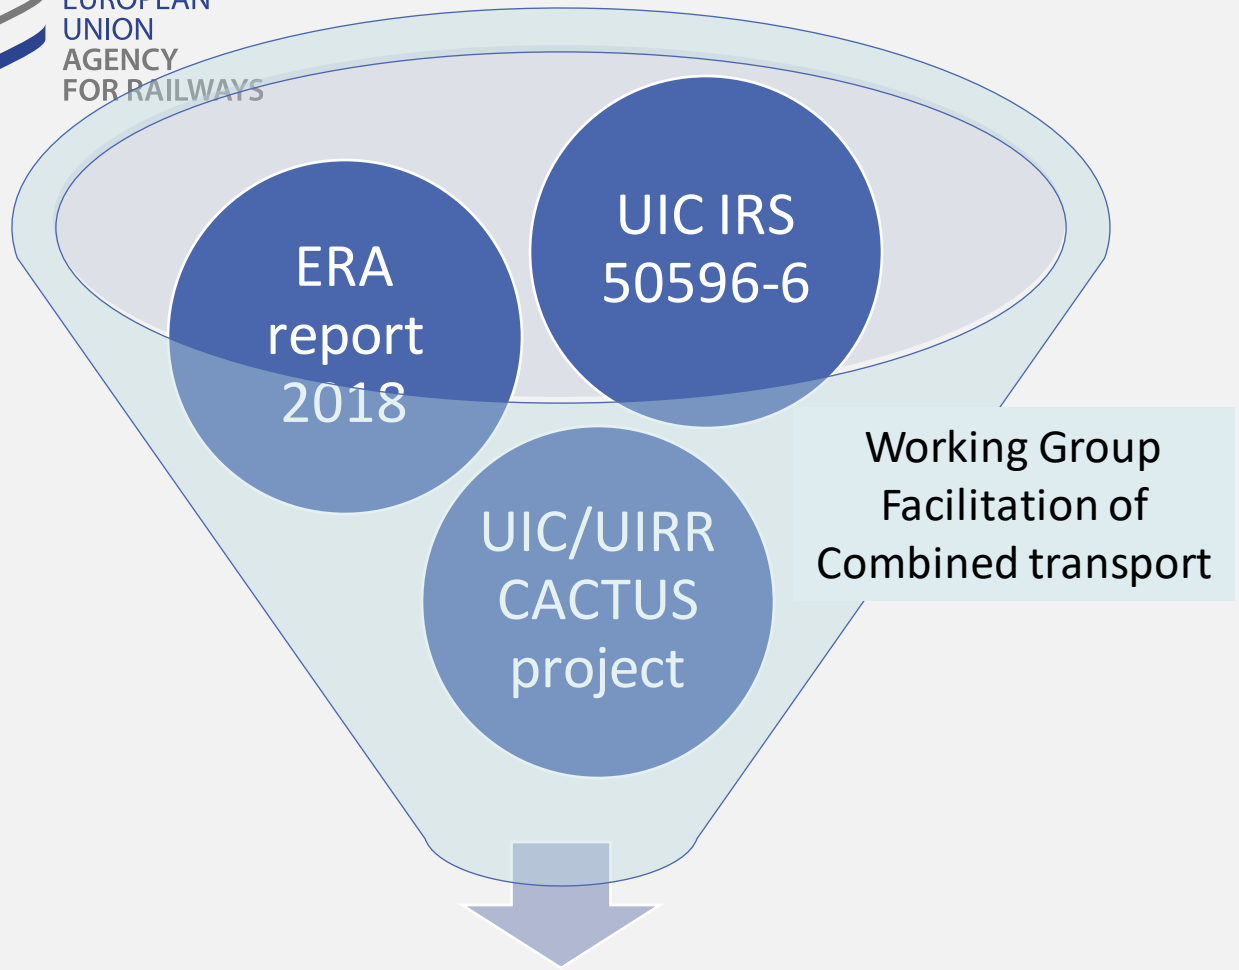

Amendments of TSI WAG, INF, OPE

Amendment of RINF

Technical document ERA/TD/2023-01/CCT

Application guide specific to the codification for combined transport

EUROPEAN UNION AGENCY FOR RAILWAYS

Application of INF and ENE TSIs to existing subsystems

- **Implementation of policy for the events of “upgrading”**

EUROPEAN UNION AGENCY FOR RAILWAYS

Implementation of policy for the events of “upgrading”

Objective:

Using the “upgrading” events in infrastructure and/ or energy existing subsystems as an opportunity to streamline a TSI compliant fixed installation, in a more effective way.

EUROPEAN UNION AGENCY FOR RAILWAYS

Cases considered as upgrading and not as the placing into service of a new infrastructure and/or energy subsystem

In 7.2 (3) of both INF and ENE TSIs:

- (a) the realignment of part of an existing route;
- (b) the creation of a bypass;
- (c) the addition of one or more tracks on an existing route, regardless of the distance between the original tracks and the additional tracks.

EUROPEAN UNION AGENCY FOR RAILWAYS

Performance criteria of the infrastructure subsystem

In addition to the cases referred to in point 7.2.(3), **‘upgrading’ is a major modification work** of an existing infrastructure subsystem **resulting in at least compliance with one additional traffic code or a change in the declared combination of traffic codes** (referred to Table 2 and Table 3 in point 4.2.1).

EUROPEAN UNION AGENCY FOR RAILWAYS

Performance criteria of the energy subsystem

In addition to the cases referred to in point 7.2.(3), **‘upgrading’ is a major modification work** of an existing energy subsystem **resulting in an increase of the line speed of more than 30km/h**.

EUROPEAN UNION AGENCY FOR RAILWAYS

Application of the TSI to the existing infrastructure or energy subsystem

For the **upgraded infrastructure or energy subsystem**, **the application of the TSI* shall be compulsory**, and **applied to the upgraded subsystem within the geographical coverage of the upgrading**. The geographical coverage of the upgrading shall be defined based on locations on tracks and metric references and shall result in the compliance of all basic parameters of the infrastructure or energy subsystem associated with the tracks that are subject to the upgrading of the subsystem.

*TSI INF for the case of upgrading of infrastructure subsystem and TSI ENE for the case of the upgrading of energy subsystem.

EUROPEAN UNION AGENCY FOR RAILWAYS

Application of the TSI to the existing infrastructure or energy subsystem

In the event of a change other than an upgrading of the existing subsystem, the application of the TSI* for each basic parameters (referred to in point 4.2.2) affected by a change shall be compulsory when the change requires to carry out a **new 'EC' verification procedure** in accordance with **Implementing Regulation (EU) 2019/250***. **Provisions defined in Articles 6 and 7 of Implementing Regulation (EU) 2019/250 shall apply.**

***TSI INF for the case of the infrastructure subsystem and TSI ENE for the case of the energy subsystem.

EUROPEAN UNION AGENCY FOR RAILWAYS

“Categorisation of lines”

- **TSI Categories of line**
- **Open Points** closed in **Appendix E**

EUROPEAN UNION AGENCY FOR RAILWAYS

TSI Categories of lines
Changes in Table 2 and 3

Table 2

Infrastructure performance parameters for passenger traffic

– Route compatibility checks are subject to point 4.2.2.5 and Appendix D.1 of the OPE TSI

Traffic code	Structure gauge	Axle load [t]	Line speed [km/h]	Usable length of platform [m]
P1	*GC*	*17(1) / 21.5(2)*	*250-350*	*400*
P2	GB	20(1)/ 22.5(2)	200-250	200-400
P3	DE3	22,5(3)	120-200	200-400
P4	GB	22,5(3)	120-200	200-400
P5	GA	20(3)	80-120	50-200
P6	G1	12(3)	n.a.	n.a.
P1520	S	22,5(3)	80-160	35-400
P1600	IRL1	22,5(3)	80-160	75-240

(1) Minimum required values of axle load to be used for checks of bridges using a dynamic appraisal, based on design mass in working order for power heads and locomotives and operational mass under normal payload for vehicles capable of carrying a payload of passengers or luggage (mass definitions in accordance with the specification referenced in Appendix T Index [1].

(2) Minimum required values of axle load to be used for checks of infrastructure using a static loading, based on design mass under exceptional payload for vehicles capable of carrying a payload of passengers or luggage (mass definitions in accordance with the specification referenced in Appendix T Index [1] with regard of the specification referenced in Appendix T Index [2]). This axle load may be linked to limited speed.

(3) To be used for checks of infrastructure used for static loading, based on design mass in working order for power heads and locomotives and design mass under exceptional payload for other vehicles (mass definitions in accordance with the specification referenced in Appendix T Index [1] with regard of the specification referenced in Appendix T Index [2]). This axle load may be linked to limited speed.

Table 3

Infrastructure performance parameters for freight traffic

Route compatibility checks are subject to point 4.2.2.5 and Appendix D.1 of the OPE TSI

Traffic code	Structure gauge	Axle load [t]	Line speed [km/h]	Train length [m]
F1	GC	22,5(1)	100-120	740-1050
F2	GB	22,5(1)	100-120	600-1050
F3	GA	20(1)	60-100	500-1050
F4	G1	18(1)	n.a.	n.a.
F1520	S	25(1)	50-120	1050
F1600	IRL1	22,5(1)	50-100	150-450

(1) To be used for static checks of infrastructure, based on design mass in working order for power heads and locomotives and design mass under normal payload for other vehicles (mass definitions in accordance with the specification referenced in Appendix T Index [1]). This axle load may be linked to limited speed.

EUROPEAN UNION AGENCY FOR RAILWAYS

TSI Categories of lines
New Table 2

Axle load values for P1 and P2 **cover** both dynamic and static based loadings requirements:

P1: 17 t (checks of bridges)

P1: 21.5 t (checks of infrastructure)

P2: 20 t (checks of bridges)

P2: 22.5 t (checks of infrastructure)

Table 2

Infrastructure performance parameters for passenger traffic

– Route compatibility checks are subject to point 4.2.2.5 and Appendix D.1 of the OPE TSI

Traffic code	Structure gauge	Axle load [t]	Line speed [km/h]	Usable length of platform [m]
P1	*GC*	*17(1) / 21.5(2)*	*250-350*	*400*
P2	GB	20(1)/ 22.5(2)	200-250	200-400
P3	DE3	22,5(3)	120-200	200-400
P4	GB	22,5(3)	120-200	200-400
P5	GA	20(3)	80-120	50-200
P6	G1	12(3)	n.a.	n.a.
P1520	S	22,5(3)	80-160	35-400
P1600	IRL1	22,5(3)	80-160	75-240

(1) Minimum required values of axle load to be used for checks of bridges using a dynamic appraisal, based on design mass in working order for power heads and locomotives and operational mass under normal payload for vehicles capable of carrying a payload of passengers or luggage (mass definitions in accordance with the specification referenced in Appendix T Index [1].

(2) Minimum required values of axle load to be used for checks of infrastructure using a static loading, based on design mass under exceptional payload for vehicles capable of carrying a payload of passengers or luggage (mass definitions in accordance with the specification referenced in Appendix T Index [1] with regard of the specification referenced in Appendix T Index [2]). This axle load may be linked to limited speed.

(3) To be used for checks of infrastructure used for static loading, based on design mass in working order for power heads and locomotives and design mass under exceptional payload for other vehicles (mass definitions in accordance with the specification referenced in Appendix T Index [1] with regard of the specification referenced in Appendix T Index [2]). This axle load may be linked to limited speed.

EUROPEAN UNION AGENCY FOR RAILWAYS

Classification of existing structures
Appendix E

- For **passenger traffic** 2 new tables:

  Table 38A - Loading capability requirements for bridges

  Table 38B - Loading capability requirements for geotechnical structures including earthworks

- For **freight traffic** 2 new tables:

  Table 39A - Loading capability requirements for bridges

  Table 39B - Loading capability requirements for geotechnical structures including earthworks

- In all tables the types of traffic are now presented in **two columns:**
  - **Traffic with loco hauled trains;**
  - **Traffic with Electric or Diesel Multiple units, Power Units and Railcars;**

EUROPEAN UNION AGENCY FOR RAILWAYS

Closed Open points
Appendix E

Traffic with **Multiple units**:

- **P1** and **P2** open points closed: (**HSLM** + EN Line category/speed or **HSLM** + LM71 to cover dynamic and static based loading requirements)
- **P3a** and **P4a** open points closed: (**Load length L** of the bridge element + EN Line category/speed)
- **Appendix D1 of OPE TSI** to be used where HSLM cannot be achieved – see Note 8

Table 38A - Loading capability requirements for bridges and additional requirements due to dynamic effect – Passenger traffic

Traffic code	Traffic with loco hauled trains: Passenger trains including Carriages (Coaches, Vans and Car Carriers) and Light Freight Wagons and Locomotives and Power Heads(2)(3)(5)(6)(4)	Traffic with Electric or Diesel Multiple Units, Power Units and Railcars (2)(5)(4)
P1	n.a.(7)	HSLM (8) and D2-200 or HSLM (8) and LM71 with $\alpha = 1.0$(14)
P2	HSLM (8) and D2-200 Or HSLM (8) and LM71 with $\alpha = 0.91$(14)	HSLM (8) and D2-200 Or HSLM (8) and LM71 with $\alpha = 0.91$(14)
P3a (> 160 km/h)	L≥4m D2-100 and L<4m D2-200(9)(10)(15)	L≥4m C2-100 and L<4m C2-200(9)(15)
P3b	L≥4m D2-100	L≥4m D2-100

EUROPEAN UNION AGENCY FOR RAILWAYS

Evolution of the ENE TSI to facilitate the charging of traction batteries

EUROPEAN UNION AGENCY FOR RAILWAYS

Evolution of the ENE TSI to facilitate the charging of traction batteries

PROBLEM:

ENE TSI, section 4.2.5 and LOC&PAS TSI, section 4.2.8.2.5, limit the maximum current at standstill and it limits the charging capacity for battery trains

"4.2.5 Current at standstill

The OCL shall be designed to sustain at least the values of current at standstill per pantograph, in accordance with the specification referenced in Appendix E, Index [2].";

EUROPEAN UNION AGENCY FOR RAILWAYS

Evolution of the ENE TSI to facilitate the charging of traction batteries

SOLUTION:

Include reference to new version of standard EN50367:2012+A1:2022 in both TSIs

Limit values of current at standstill can be exceeded for battery trains when charging

(3) For trains equipped with electric energy storage for traction purposes:

– The maximum current per pantograph at vehicle standstill in DC systems can be exceeded only for charging electric energy storage for traction, in allowed locations and under the specific conditions defined in the register of infrastructure. Only in that case, it shall be possible for a unit to enable the capacity to exceed the maximum current at standstill for DC systems.

EUROPEAN UNION AGENCY FOR RAILWAYS

Multiple pantograph operation (more than 2)

EUROPEAN UNION AGENCY FOR RAILWAYS

Multiple pantograph operation (more than 2)

Design of the OCL and pantograph distribution
in case of multiple pantograph operation (more than 2):

Analysis of rules in different Member States

Analysis of results from measurements and simulations

Check of actual TSI regarding necessary improvements

EUROPEAN UNION AGENCY FOR RAILWAYS

Multiple pantograph operation (more than 2)

It was concluded that more measurements/simulations are necessary to finally define TSI adjustments

Definition of necessary future research steps for general use of proposed rules

Adjustment in the text for a consistent use:

- ENE TSI, sections 4.2.12 and 4.2.13
- LOC&PAS TSI, sections 4.2.8.2.9.7 and 6.2.3.21

EUROPEAN UNION AGENCY FOR RAILWAYS

Communication between Railway Undertaking and Infrastructure Manager

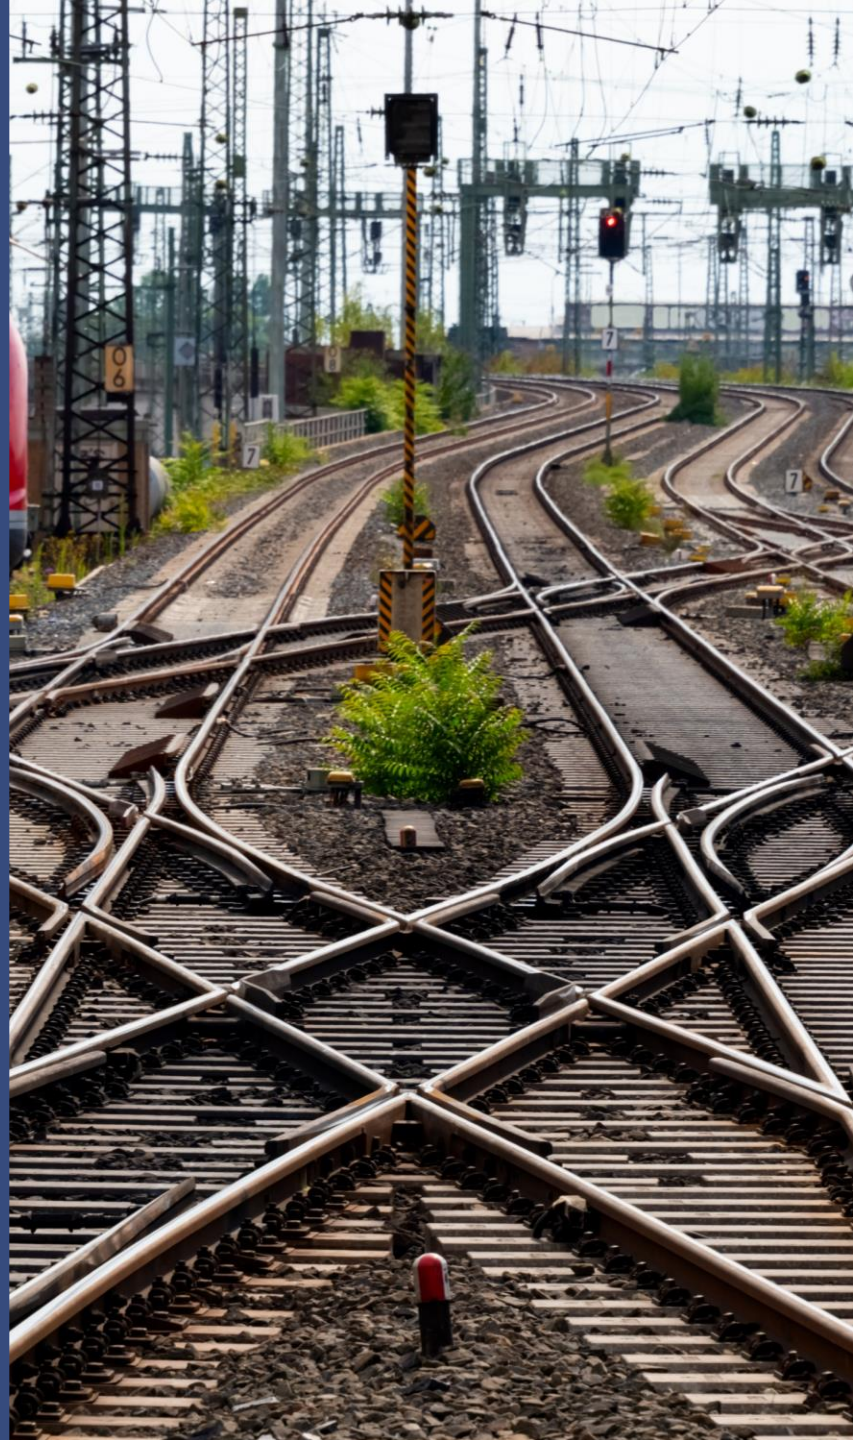

EUROPEAN UNION AGENCY FOR RAILWAYS

	"Normal" communication	"Real-time" communication	"Emergency" communication
Channel	From IM to RU	1. From IM to RU 2. From Signaler to Driver	From Signaler to Driver
Means	RINF	1. RINF 2. Operational Instructions	Any means

SMS integration

EUROPEAN UNION AGENCY FOR RAILWAYS

Questions & Answers

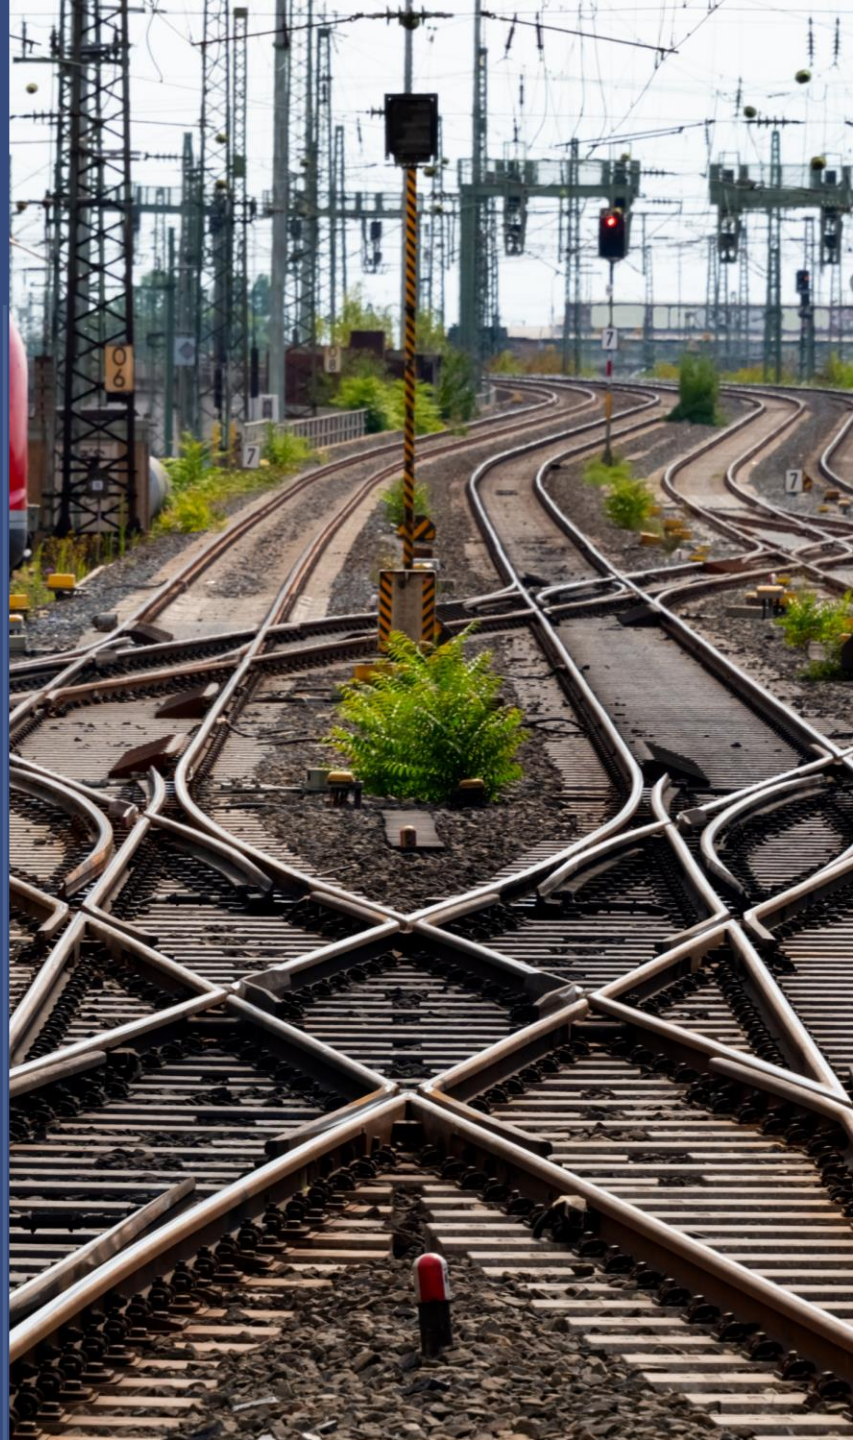

EUROPEAN UNION AGENCY FOR RAILWAYS

Your Feedback

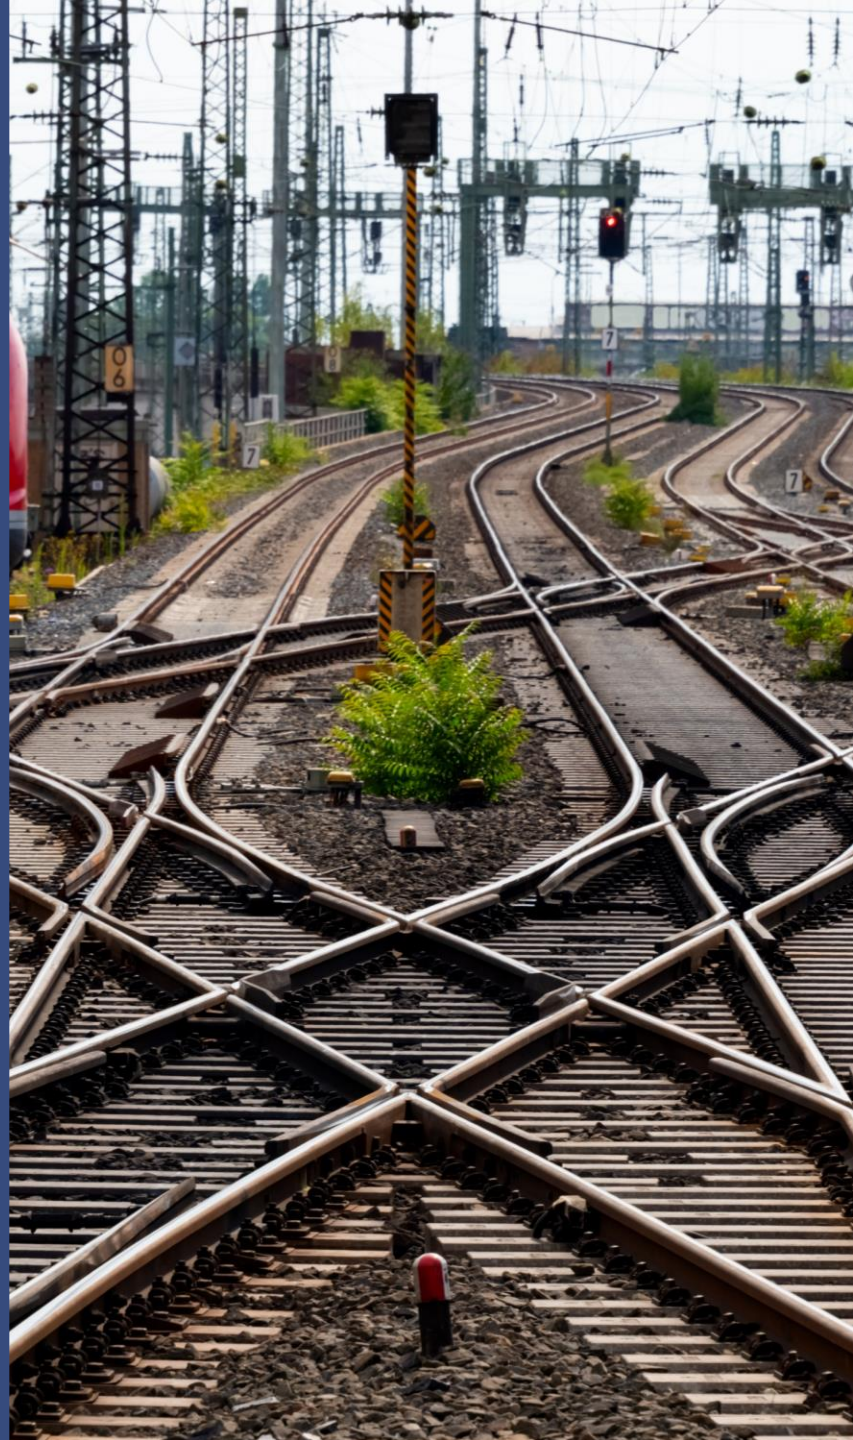

EUROPEAN UNION AGENCY FOR RAILWAYS

Upcoming Events

European Rail Safety Days 2023

20-22 September 2023
Tallinn, Estonia

EUROPEAN UNION AGENCY FOR RAILWAYS

Upcoming Events

Safety Days Follow-Up Webinar

13 October 2023
13.00 – 14.00 (CEST)

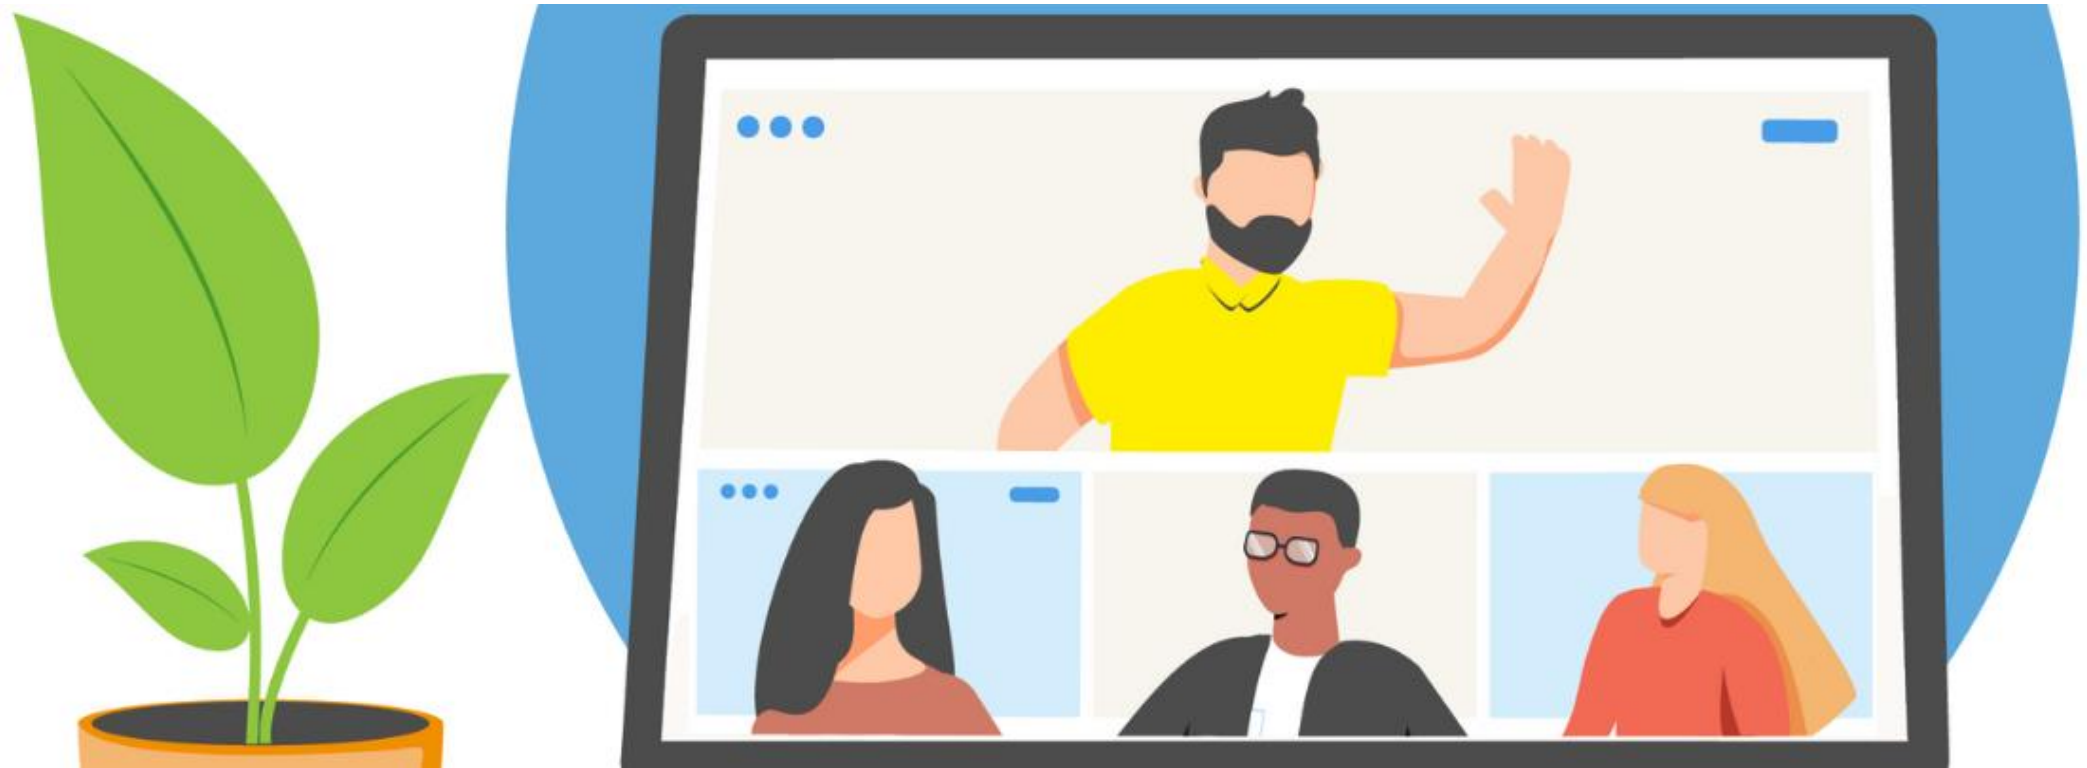

EUROPEAN UNION AGENCY FOR RAILWAYS

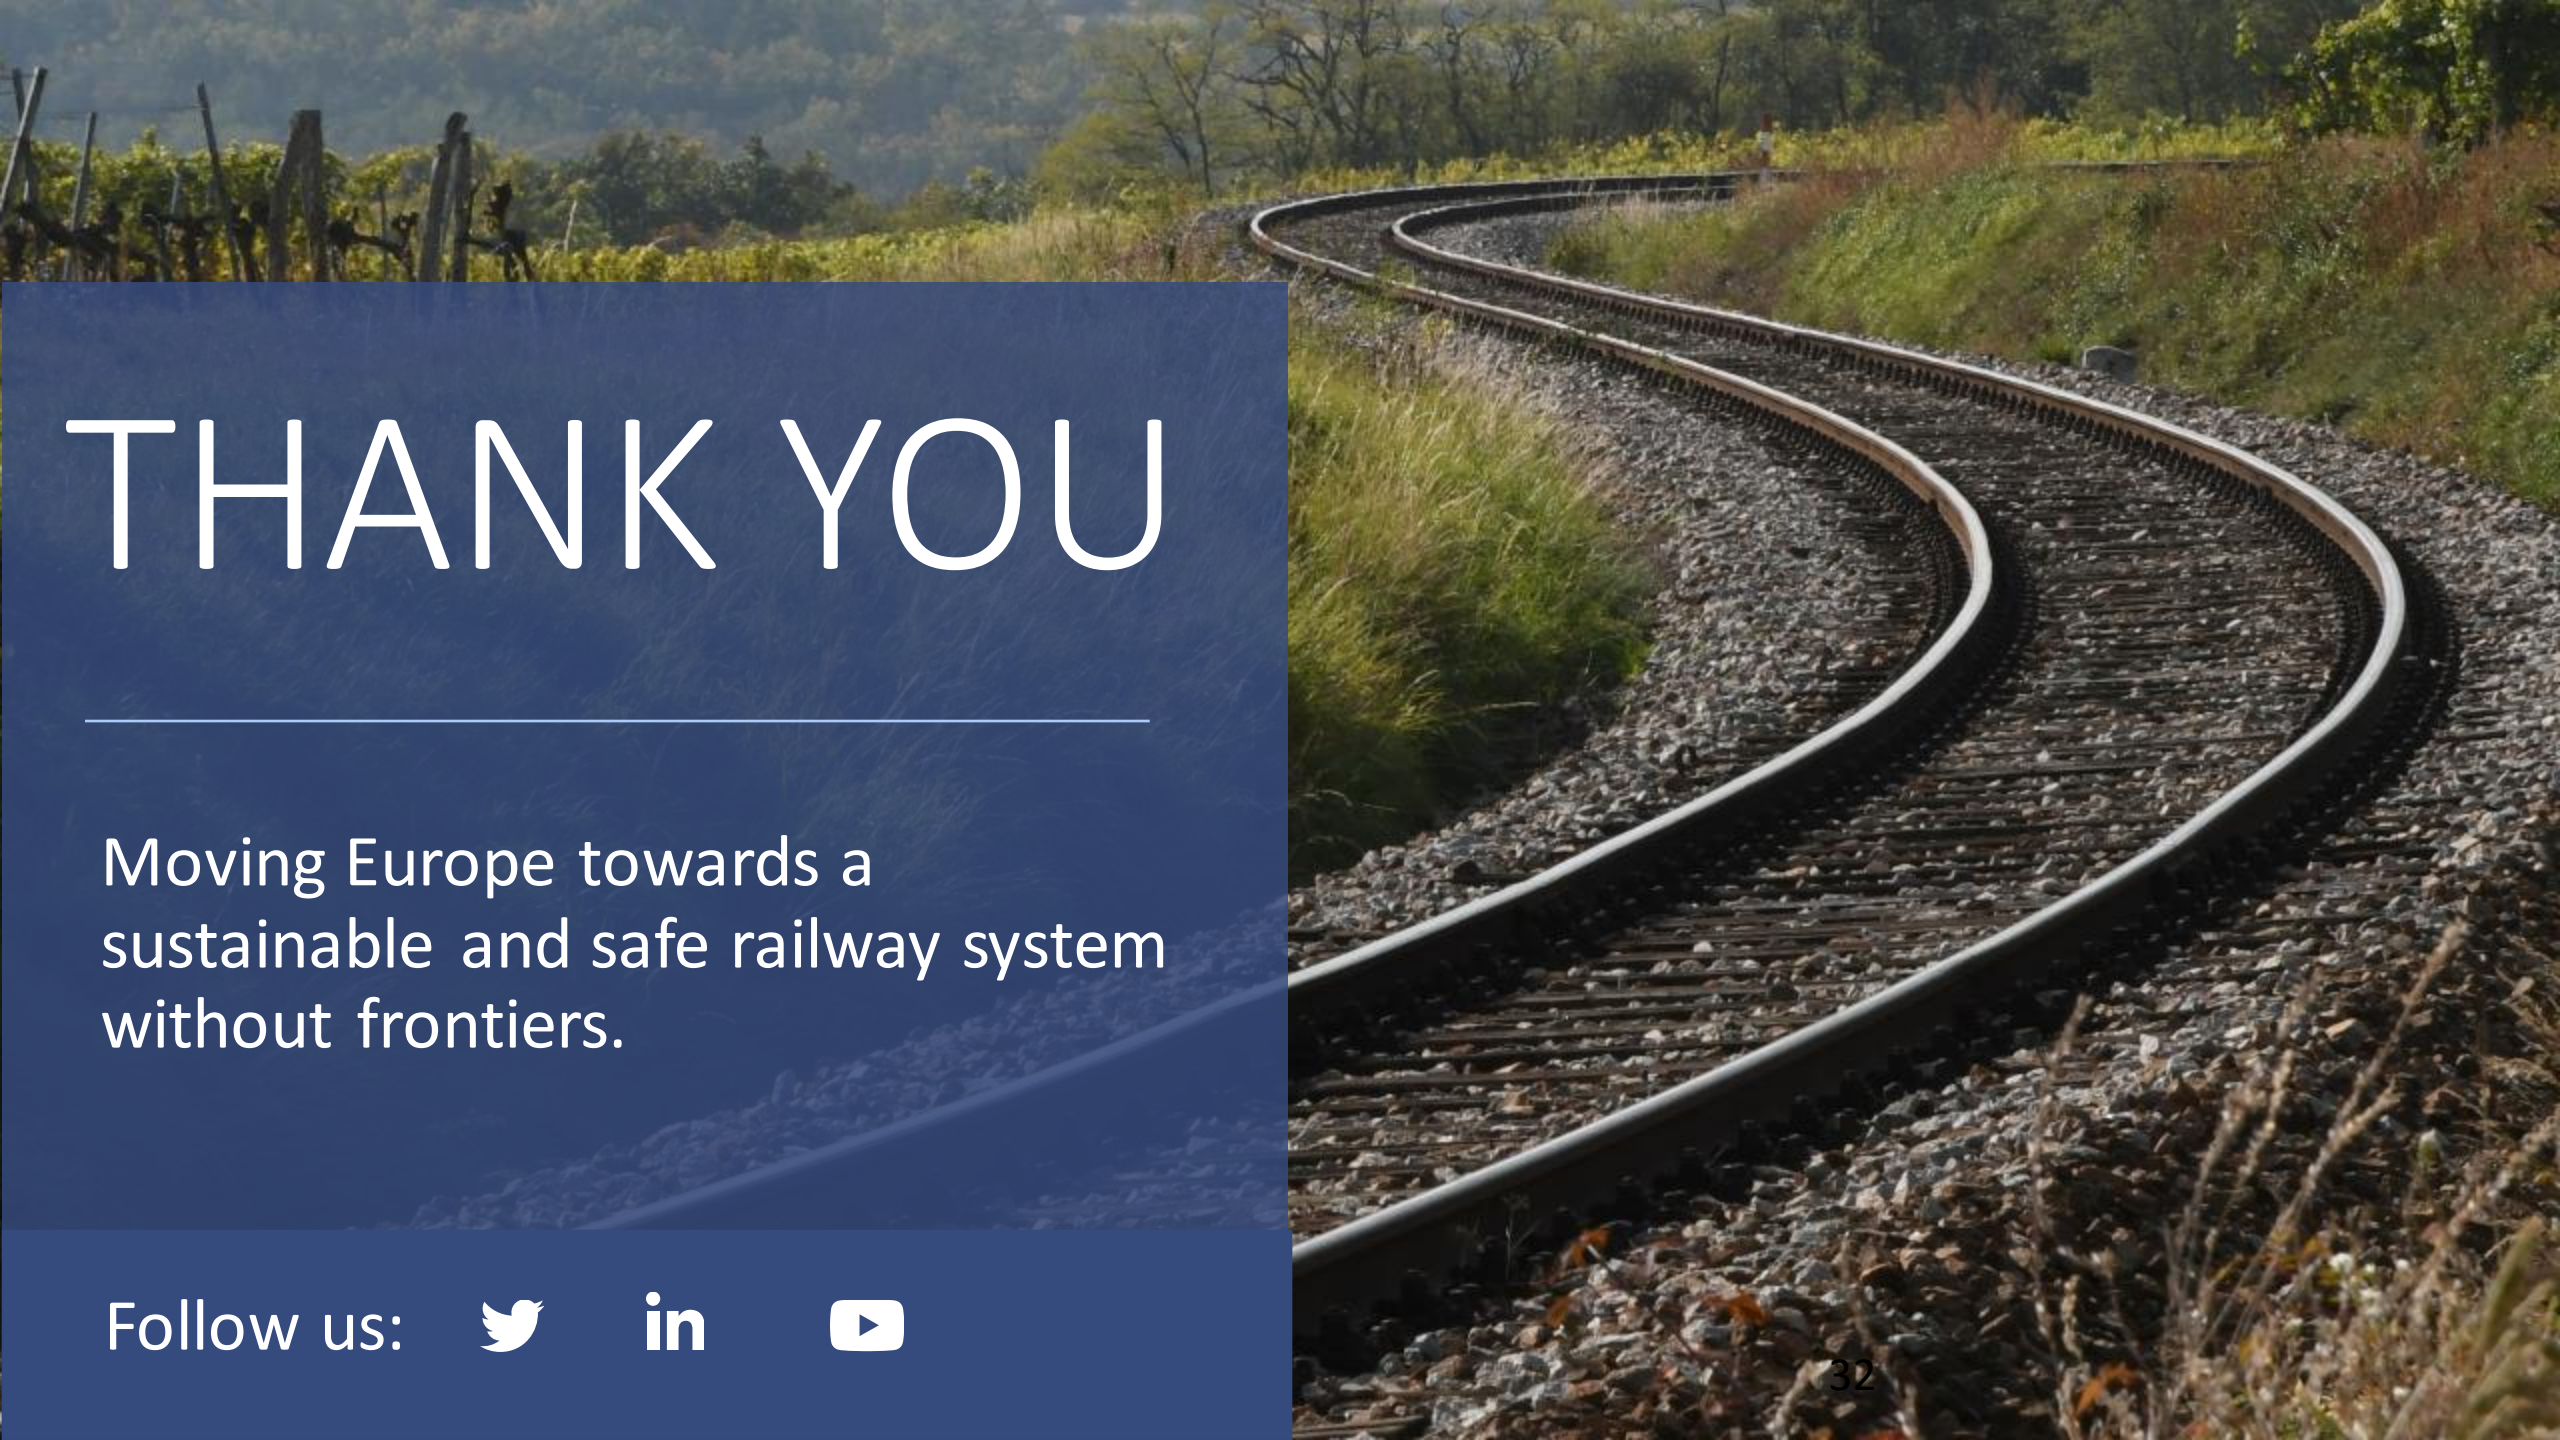

THANK YOU

Moving Europe towards a sustainable and safe railway system without frontiers.

Follow us: